

INSTALLATION INSTRUCTION

Item# 12856-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER .
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.
3. Loosen canopy screws (E) to separate the mounting plate (A) from canopy (D).
4. Decide on a suitable length of the rods, the 15" rod can be separated into individual 6" (G2) or 9" (G1) rod depending on the desired hanging height.
5. Connect the quick link of rod (G1 or G2 or G1+G2) to the loop of fixture body (H) and loop of canopy (D), then close the quick link.
Carefully feed fixture wires through rod (G) and canopy (D).
6. Feed the fixtures wires and safety cable through the mounting plate (A) and allow safety cable to exit through the groove and loop once, then secure safety cable with cable lock provided.
7. Position the mounting plate (A) on the ceiling and mark the location of the two drywall anchors (Q). Pre-drill the holes for the drywall anchors (Q). Then insert the drywall anchors (Q) into the ceiling.
8. Attach the mounting plate (A) to the junction box (not included) using mounting screws (D) (Size: 8-32*1/2"L). The side of the mounting plate marked "GND" must face out. Place the wood screws (R) through the holes of the mounting plate (A) and lock into the drywall anchors (Q) to secure the mounting plate (A) to the ceiling.

CONNECTING THE WIRE (Fig. 2)

9. Connect the electrical wire as shown in Fig.2, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise, connect the fixture ground wire directly to the mounting plate using green screw provided.
10. Tuck wire connections neatly into the outlet box.

FINISHING THE FIXTURE (Fig. 1&3)

11. Attach canopy (D) to mounting plate (A) and secure firmly with the canopy screws (E).
12. install (6) six candelabra base bulbs (L) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the Fixture specification- **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
13. Attach the glass (I) 1st Rubber Washer (P) followed by alabaster (J), secure with washer (P) then Nut (K)
Your installation is now complete. Return power to the outlet box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Warning: to reduce the risk of fire, electric shock, or personal injury, mount to outlet box marked acceptable for fan support of 60 lbs. or more and use mounting screws provided with outlet box.

Warning: This luminaire must be mounted or supported independently of an outlet box.

Fig.1

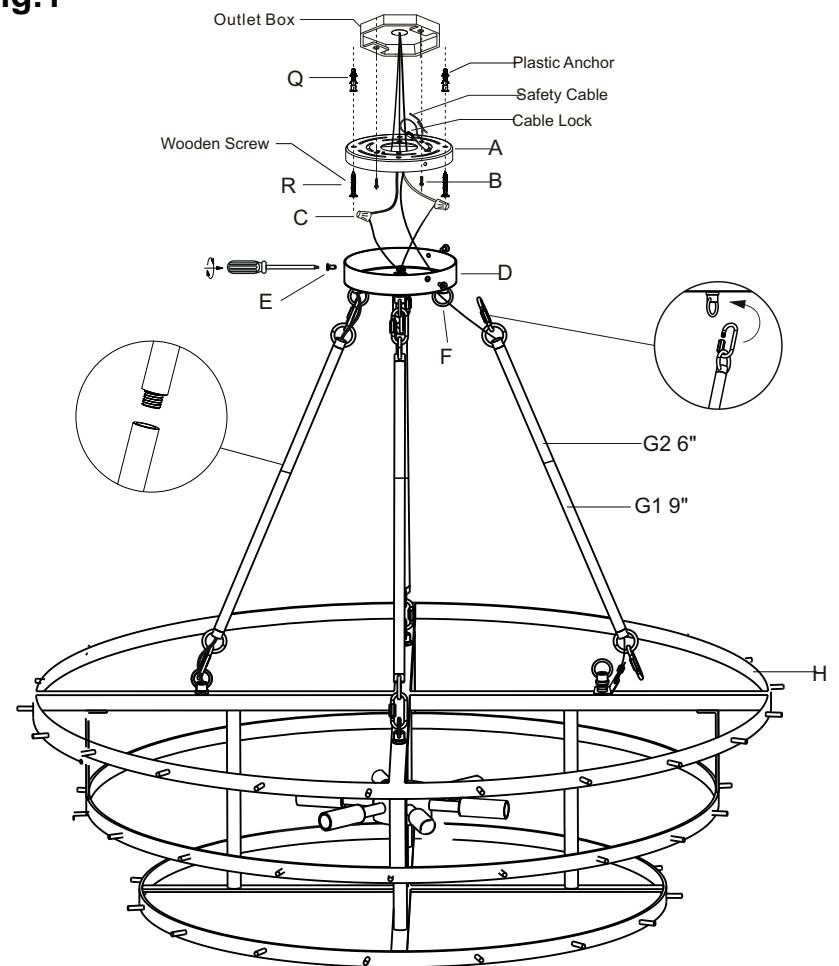


Fig. 2


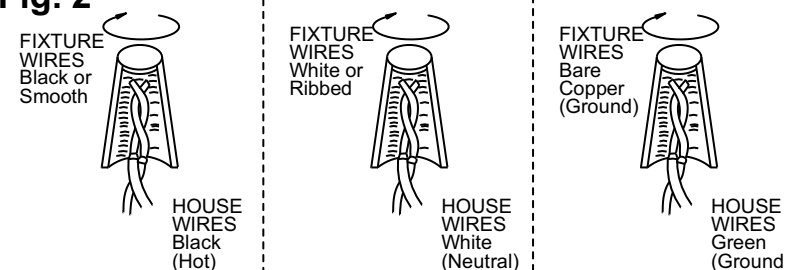


Fig.3

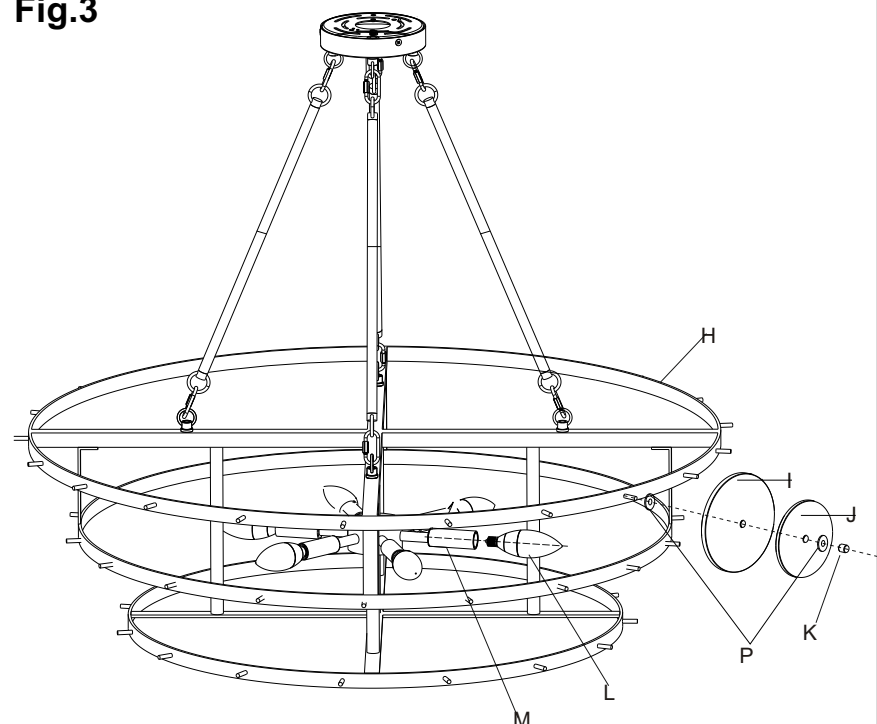

american
lighting
association