

INSTALLATION INSTRUCTIONS

Item# 15575-613

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.

2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig.1)

3. Unscrew the mounting screw (E) from the canopy (D) and detach the mounting plate (B).

4. Attach mounting plate (B) to junction box (not included) using junction box screw (A). The side of mounting plate (B) marked "GND" must face out.

5. Determine desired hanging height and cut off the excess braided cotton rope (G). Loosening screw (F) on canopy (D) and pass wire carefully through canopy (D). Then secure wire by tighten screw (F) on canopy (D).

CONNECTING THE WIRES (Fig. 2)

6. Connect electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the ground wire directly to the mounting plate (B) using the green screw (C) provided.

7. Tuck wire connectors neatly into the junction box.

COMPLETING THE INSTALLATION (Fig. 1)

8. Position canopy (D) up against ceiling and thread mounting screw (E) to secure fixture to ceiling.

9. Unscrew the lock ring (H) from the top metal cap (I) of the socket assembly. Raise lock ring (H) and metal cap (I) up, tilt the notch on the small metal cover (J) by rotating it through the glass (K), make the glass (K) seating on it. Adjust the position of the small metal cover (J) to make the glass (K) straight. Secure with metal cap (I) by using lock ring (H). Do not over tighten.

10. Install (1) one medium base bulb up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. —**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

To straighten the cord, please use a blow dryer (not included) if necessary.

Note: If the current height is not feasible, adjust to preferred hanging height and secure the knot with zip tie included.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

IMPORTANT: FIXTURE SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN TO ENSURE PROPER WIRING AND INSTALLATION.

Fig.1

Set#A-020-118A

-Mounting plate

-Ground Screw

-Junction Box Screw*2

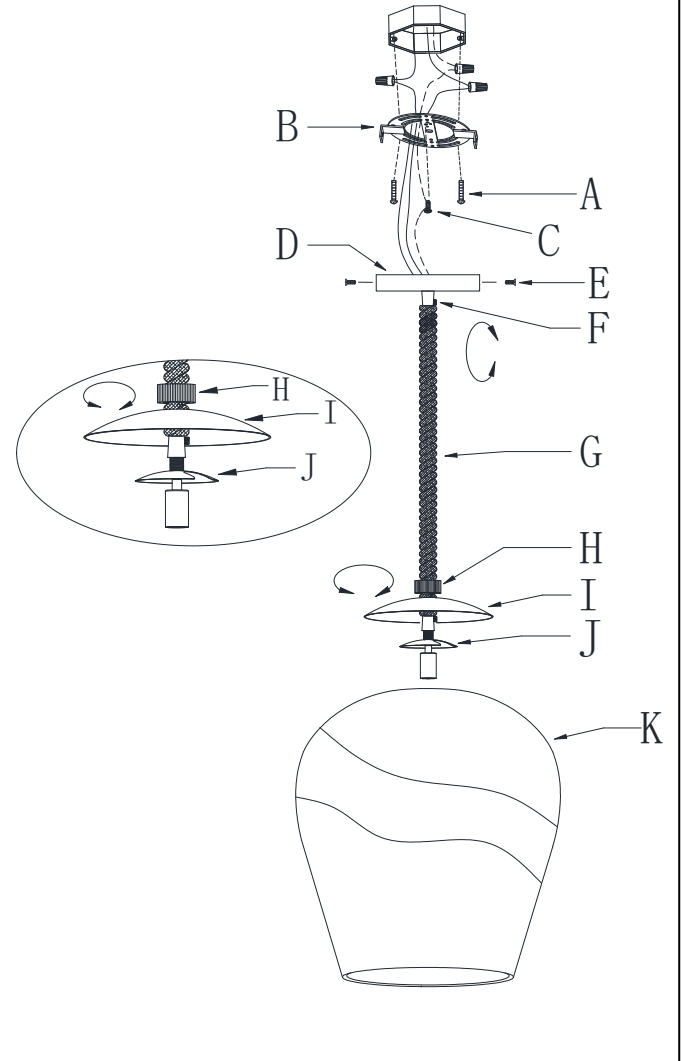


Fig. 2


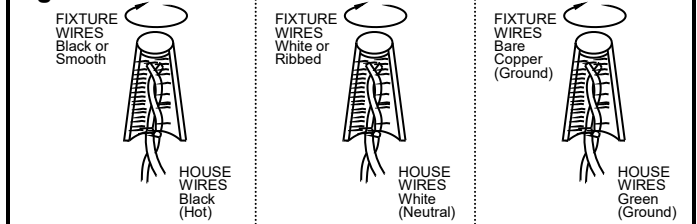


Fig.3



a. Hardware Bag:

- A. Junction Box Screw*2
- B. Mounting plate*1
- C. Ground screw*1
- D. Canopy*1
- E. Mounting screw*2

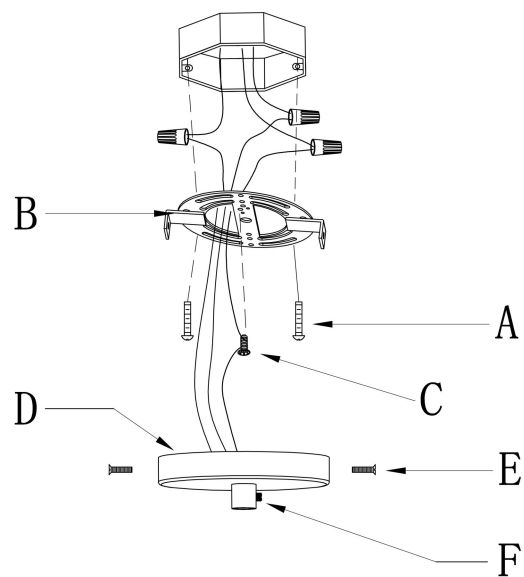