

INSTALLATION INSTRUCTIONS

For Item#2636-732

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig. 1)

3. Install (1) one medium base bulb (L) up to 60 watts each or CFL or LED equivalent (Not included) in accordance with the fixture specification—**DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**.
4. Loosen nut (H) and cover (I), then tilt glass shade (M) through bulb (L) and secure glass shade (M) onto holder (K).
5. Place cover (I) over all thread (J) and secure with nut (H), Do not over tighten.
6. Thread metal tube (G) onto all thread (J) on top of fixture body.
7. Determine the desired hanging height by loosening screw (E) use allen screw wrench (N) provided from bushing (F) and pushing cord through the center of bushing (F), if necessary, cut cord leaving an additional 8" to allow for electrical connection.
8. Secure cord into bushing (F) by tightening screw (E) using allen screw wrench (N) provided.
9. Carefully cut and remove approximately 4" of the outer sheathing from the cord and strip 1/2" of the wire ends bare to expose copper strands.
10. Attach mounting plate (A) to the junction box (Not included) using screws (B) (Size: #8-32N*L0.5"). The side of the mounting plate (A) marked "GND" must face out.

CONNECTING THE WIRES (Fig. 2)

11. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.

COMPLETING THE INSTALLATION (Fig. 1)

12. Place canopy (C) over mounting plate (A) and secure with screws (D).
13. To straighten the cord, use a blow dryer (Not included) if necessary.

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

• • • Fig. 1

Set# A-021-118DH

-Mounting Plate

-Ground Screw

-Mounting Screws *2

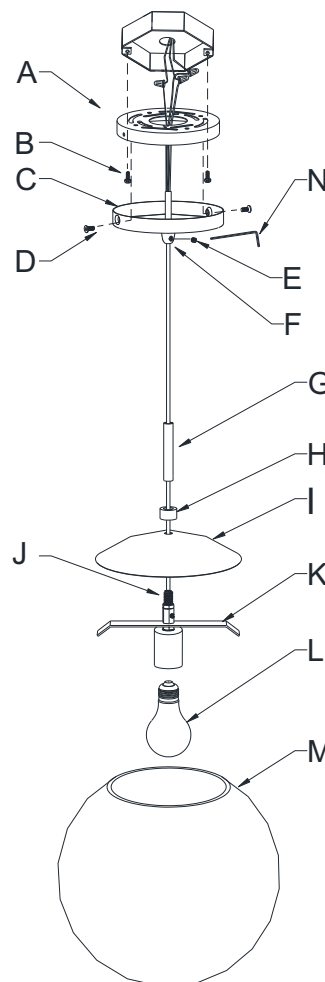


Fig. 2

